

Fuseholder Open Design, 14.3 x 51 mm, Screw Clamp



500 VAC · 4 W/40 A



GAM T1 NNO

### Description

- This product is phased-out without alternate Type. Availability upon request.
- With lock and safety calibration
- Screw or rivet fastening

### References

This type is Phase-out without alternate type  
Last order date: 17.06.2011


### Weblinks

[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

### Technical Data

Fuse-Link	14.3 x 51 mm	Soldering Methods	Wave <a href="#">Soldering Profile</a>
Mounting	Screw	Contact Resistance	< mΩ at 20 mV
Mounting	Screw or Rivet	Resistance to Vibration	acc. to NF C 20-706 / IEC 60068-2-6, test Fc
Terminal	Screw clamps	Shocks	acc. to NF C 20-706 / IEC 60068-2-27
Rated Voltage	500VAC	Bumps	acc. to NF C 20-729 / IEC 60068-2-29
Rated current	40 A	Salt Mist	acc. to NF C 20-711 / IEC 60068-2-11
Rated Power Acceptance IEC	4 W / 40 A @ Ta 23 °C	Dump Heat	acc. to NF C 20-604
Degree of Protection	IP 00	Climatic Composite	acc. to NF C 20-619 Phase D
Admissible Ambient Air Temp.	-40 °C to 85 °C		
Climatic Category	40/085/21 acc. to IEC 60068-1		
Material: Socket	Thermoset		
Unit Weight	94 g		
Storage Conditions	0 °C to 60 °C, max. 70% r.h.		
Product Marking	Rated voltage, Rated current, HB8		

### Dimension

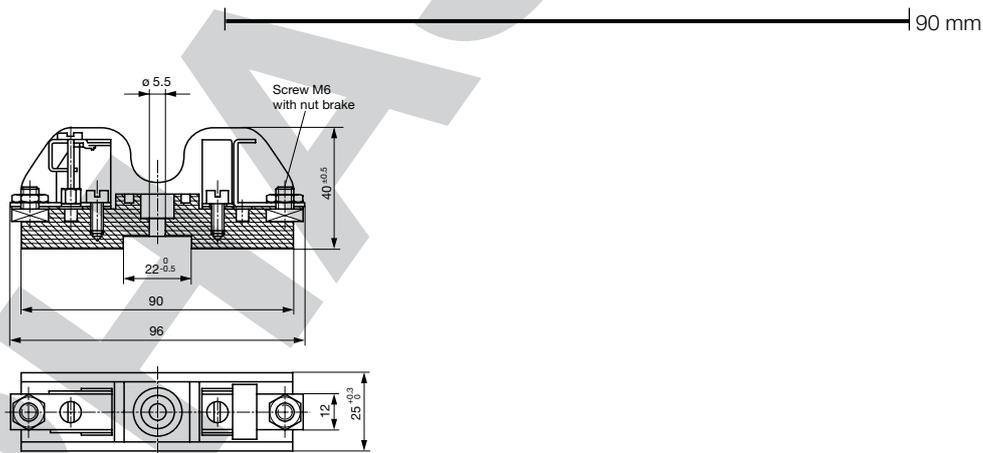

### Packaging Unit

Bulk (100 pcs.)