

Special Fuse, 14 x 50 mm, Quick-Acting F, 380 VDC



380 VDC · Quick-Acting F



NNO

Description

- High breaking capacity

References

Corresponding Fuseholder [231756R](#)

We recommend for new applications the type [MA](#)

Last order date: 20.06.2012


Weblinks

[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

Technical Data

Rated Voltage	380 VDC	Resistance to Vibration	acc. to NF C 20-706 / IEC 60068-2-6, test Fc
Rated current	0.5 - 50 A	Shocks	acc. to NF C 20-706 / IEC 60068-2-27
Breaking Capacity	85 kA	Salt Mist	acc. to NF C 20-711 / IEC 60068-2-11
Characteristic	Quick-Acting F	Dump Heat	acc. to NF C 20-604
Admissible Ambient Air Temp.	-5 °C to 70 °C	Climatic Composite	acc. to NF C 20-610 Phase 1-2-3-5
Climatic Category	5/070/21 acc. to IEC 60068-1		
Material: Tube	Ceramic		
Unit Weight	30 g		
Storage Conditions	0 °C to 60 °C, max. 70% r.h.		
Product Marking	Type, Current, Rated voltage		

Dimension

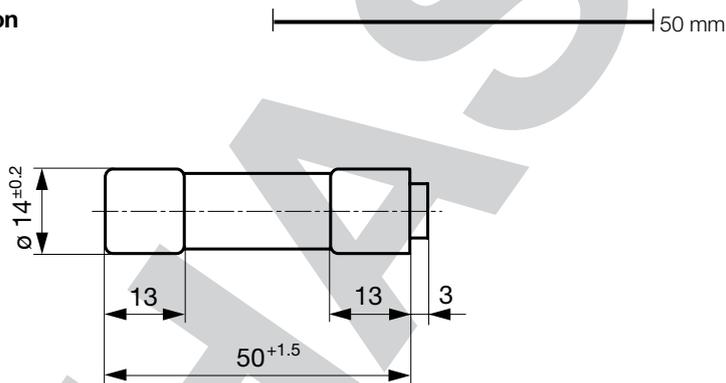


Pre-Arcing Time

Rated Current I_n 1.25 x I_n min. 1.8 x I_n max. 3.0 x I_n max.

0.5 A - 50 A 60 min 60 min 25 s

Time-Current-Curves

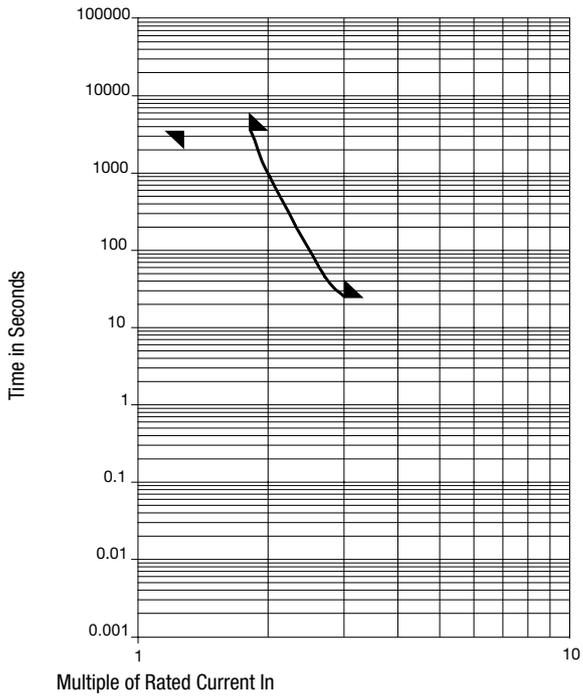

Packaging Unit Small Box Pack (10 pcs.)

PHASE OUT