

Multibox UPB 160A, DIN 00



See below:

[Approvals and Compliances](#)

Description

- Glass fiber Polyester
- Difficult to burn
- Impact resistant

Unique Selling Proposition

- Direct mounting on formwork for uncomplicated concreting , tested with flow cement SVB
- Wall thickness adjustable from 18 to 25 centimeters
- filled with styrofoam - all around tight, so that no concrete water can penetrate

Characteristics

- With 3 x 1-pole fuse switch disconnecter
- Bolt lock (4-kant with Slot)
- Protection 2-piece, transparent and sealable
- N-connector for TN-C to TN-S
- N-connector separating Piece self-opening when loosening the screw
- Voltage test possible only if fuse with not insulated straps used

References

Alternative: Other rated current

Weblinks

[pdf data sheet](#), [html datasheet](#), [Detailed request for product](#), [Microsite](#)

Customer Specific Solutions

Whether surface or flush-mounted, with Multibox you always work with the same housings and fuse elements (60A) or switch-disconnectors (DIN00). The additional housings, which can be attached with one click, give you maximum flexibility with a minimum of effort.



Smart Meetering MULTIBOX is up to the increased requirements. The energy meters of the latest generation of leading manufacturers fit perfectly into the housing the MULTIBOX. This is how the power distributors see the power supply and the energy measurement centrally at the point of entry into the building at a glance.



Fiber to the Home MULTIBOX introduces new technologies optimally and space-saving into the building. It takes on the role of the Building Entry Point (BEP). The flexible concept of MULTIBOX takes both a combined power cable with Speed Pipes as well as a separate fiber optic cable to the building.



MULTIBOX UPB The MULTIBOX UPB can be set in concrete directly with the simplest means. The UPB version is mounted on the formwork in a few easy steps and adjusted to the wall thickness with the wing screws.



MULTIBOX UPB After the pipes have been installed, the MULTIBOX can be set in concrete. As soon as the formwork is stripped, the polystyrene block is removed and the safety elements are installed and connected. The front frame and the cover form the end.

Technical Data

Rated Current Ie	160 A @ 500VAC
	125 A @ 690VAC
Rated voltage Ue	690VAC
Rated isolation voltage Ui	1000VAC
Rated Power Operating Frequency fe	50 Hz

Rated Impulse Withstand Voltage Uimp	8 kV
Conditioned Rated Short Circuit Current	50 kA @ 500VAC
Rated short-time withstand current with fuse links	20 kA @ 500VAC
Allowed Ambient Temperature	-25 °C to +40 °C acc. to IEC 61439
Protection by closed housing	IP54

Terminals

NH-Fuse-Link with Screw Terminal for Cable Log	M8
Fuse Element with double terminals strap	6 - 70 mm ²

Neutral Disconnecter with Straps	6 - 70 mm ²
Earth Connection Bride	6 - 70 mm ²
Double terminal	6 - 50 mm ²
Earth Connection (outside)	M8

NH-Switch disconnecter

Fuse-Link	DIN 00
Rated Current Ie	160A @ 500VAC 125A @ 690VAC
Rated voltage Ue	690VAC 220VDC
Rated isolation voltage Ui	1000VAC
Rated Power Operating Frequency fe	50Hz
Rated Impulse Withstand Voltage Uimp	8kV
Conditioned Rated Short Circuit Current	80kA @ 500VAC 50kA @ 690VAC

Category of use AC	AC-23B @ 400VAC AC-22B @ 500VAC AC-21B @ 690VAC
Category of use DC	DC-22B @ 220VDC
Rated power dissipation without NH fuse-links at Ith	2.3 W
Protection class	IP20
Mechanical lifetime	1400 Insertions
Electrical lifetime	200 Insertions
Ambient Temperature Tu**)	-40°C to +55°C

**) A reduction of the rated current is required above 30°C

Approvals and Compliances


Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

Compliances

The product complies with following Guide Lines

Identification	Details	Initiator	Description
	CE declaration of conformity	SCHURTER AG	The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.
	UKCA declaration of conformity	SCHURTER AG	The UKCA marking declares that the product complies with the applicable requirements laid down in the British Amendment of Regulation (EC) 765/2008.
	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.

Assembly Instructions

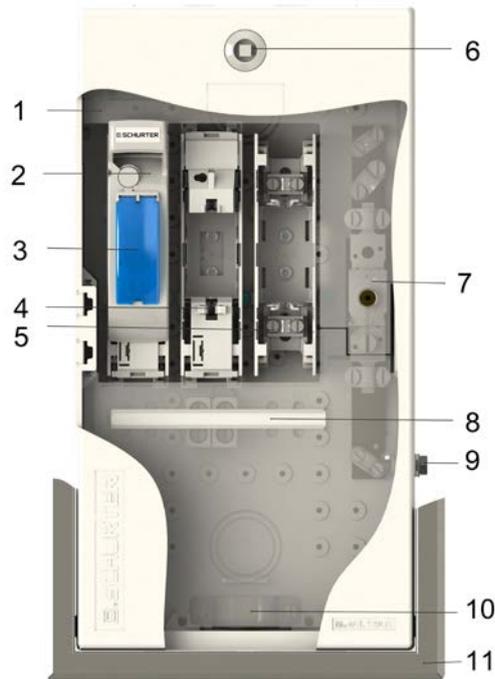


- 1. Cover Plate 2-piece, transparent and lockeable
- 2. NH-NH fuse load--breaker
- 3. Hinged window
- 4. Inner Cover
- 5. Various connection variants: clamp-Cable lug-Double terminals
- 6. Square lock
- 7. Neutral conductor isolator for TN-S/TN-C
- 8. Labeling field
- 9. External ground connection (optional)
- 10. Cable fixing (optional)
- 11. Front frame for UP mounting



12. 63A- Fuse element with different connection variants


Diagrams

TN-S (delivered condition)



- L = Pole conductor
- PE = Protective conductorPEN = PEN conductor
- N = Neutral conductor
- NE = Neutral earth conductor
- TS = Separating screw
- KA = Cable armor



TN-C



- L = Pole conductor
- PE = Protective conductorPEN = PEN conductor
- N = Neutral conductor
- NE = Neutral earth conductor
- TS = Separating screw
- KA = Cable armor

Order number key

Single

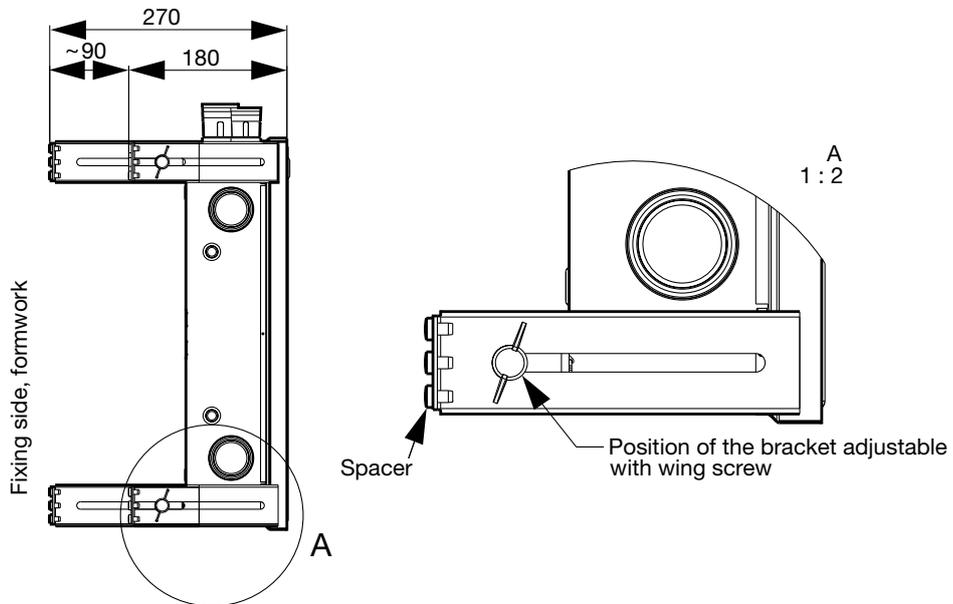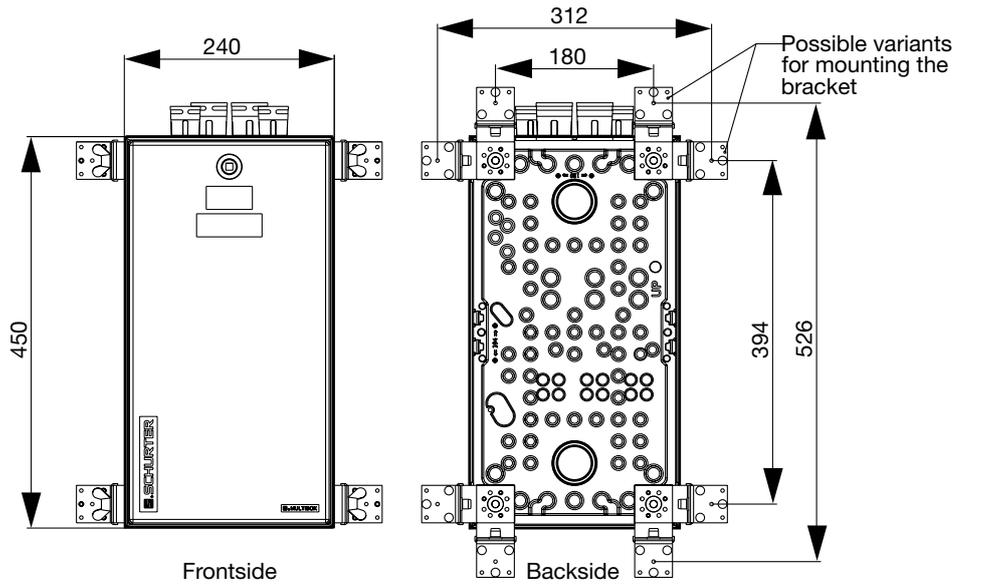

Combi

