Circuit Breaker for Equipment thermal-magnetic, Flange type, Reset type, Screw terminals





### **Approvals and Compliances**

## **Description**

- Flange type
- TMF12-211 Thermal-magnetic circuit breaker
- 1-pole
- Reset type
- Insensitive to shock or vibration
- Bolts and nuts

#### **Unique Selling Proposition**

- Tripping characteristic Fast or Slow
- Positively trip-free release
- Available with cover
- Different mounting possibilities

#### **Applications**

- Power supplies
- Uninterruptible power supply
- Power tools
- Household appliances Last order date: 30.09.2024 Last delivery date: 20.12.2024

#### Weblinks

pdf data sheet, html datasheet, General Product Information, Distributor-Stock-Check, Detailed request for product, Product News

#### **Technical Data**

Rated Voltage AC	AC 240 VAC
Rated Voltage DC	28 VDC
Rated current range AC	0.05 - 15 A, see approbations
Conditional short circuit capa-	IEC 60934: PC1, AC 240 V: 1 kA
city Inc	
Short circuit capacity Icn	IEC 60934: AC 240 V : 200 A
	AC/DC 28 V : 400 A
Degree of Protection	front side IP40 acc. to IEC 60529
Dielectric Strength	50Hz: > 1.5 kV
	Impulse 1.2/50 µs: > 2.5 kV
Insulation Resistance	500 VDC > 100 MΩ
Endurance typical	2 x Ir: 5000 switching cycles
Endurance minimum	Reset type
	AC: 2 x lr, cos φ 0.6:
	DC: $2 \times Ir$ , $L/R = 2 - 3 \text{ ms}$ :
	50 switching cycles

IEC: min. 40 trips
@ 6 x lr, cos φ 0.6
UL / CSA: min. 50 trips
@ 1.5 x lr, cos φ 0.75
-5°C to 60°C
± 1.5 mm @ 10 - 60 Hz
acc. to IEC 60068-2-6, test Fc
10 G @ 60 - 500 Hz
acc. to IEC 60068-2-6, test Fc
100 G / 6ms
acc. to IEC 60068-2-27, test Ea
Thermal-Magnetic
Reset type
ca. 10g

## **Approvals and Compliances**

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

### **Approvals**

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products. Approval Reference Type: TM12

Approval Logo	Certificates	Certification Body	Description	
<b>₽</b>	VDE Approvals	VDE	VDE Certificate Number: 99673	
c <b>FL</b> °us	UL Approvals	UL	UR File Number: E71572	
<b>®</b>	CSA Approvals	CSA	CSA Certification Record: LR 37712	
<b>(W)</b>	CCC Approvals	CCC	CCC Certificate Number: 2024010307710410	

### **Product standards**

Product standards that are referenced

Organization	Design	Standard	Description
<u>IEC</u>	Designed according to	IEC 60934	Circuit-breakers for equipment (CBE)
(I)	Designed according to	UL 1077	Standard for Supplementary Protectors for Use in Electrical Equipment
( <u>())</u>	Designed according to	GB 17701	Circuit-breaker for equipment

## **Application standards**

Application standards where the product can be used

Organization	Design	Standard		Description
<u>IEC</u>	Suitable for applications acc.	IEC/UL 62368-1		Audio/video, information and communication technology equipment - Part 1: Safety requirements

### Compliances


The product complies with following Guide Lines

Identification	Details	Initiator	Description
C€	CE declaration of conformity	SCHURTER AG	The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.
UK CA	UKCA declaration of conformity	SCHURTER AG	The UKCA marking declares that the product complies with the applicable requirements laid down in the British Amendment of Regulation (EC) 765/2008.
RoHS	RoHS	SCHURTER AG	Directive RoHS 2011/65/EU, Amendment (EU) 2015/863
<b>50</b>	China RoHS	SCHURTER AG	The law SJ $/$ T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
REACH	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.




# Dimension [mm]

TMx12-112

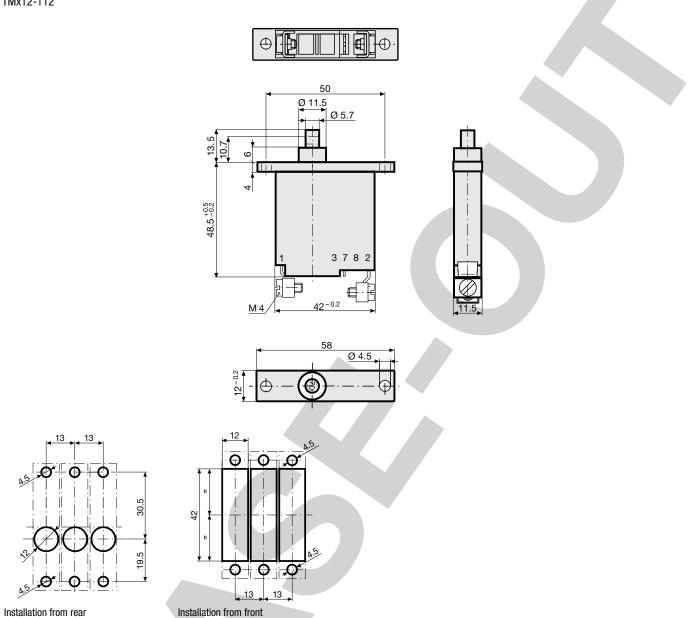


# Diagrams


TM12-...




TM12-...N



TM12-...S



TM12-...SN



Approval	Main circuit			Auxiliary circuit		
	Rated current	Rated Voltage AC	Rated Voltage DC	Rated current	Rated Voltage AC	Rated Voltage DC
UL 1077 CSA C22.2 No. 235	0.0515 A	240 V	28 V	2 A 3 A	120 V -	- 28 V
CSA C22.2 No. 235	0.0516 A	240 V	28 V	1 A	240 V	-
EN 60934	0.0516 A	240 V	28 V	1 A	240 V	28 V
GB 17701	0.0516 A	240 V	28 V	1 A	240 V	28 V

# Typical internal resistance TMF12

Rated Current [A]	Internal Resistance $[\Omega]$
0.05	335.00
0.50	4.37
1.00	1.23
2.00	0.369
3.00	0.181
4.00	0.097
5.00	0.055
6.00	0.044
7.00	0.0231
8.00	0.0227
9.00	0.0142
10.00	0.0123
11.00	0.012
12.00	0.012
13.00	0.0108
14.00	0.0091
15.00	0.0089
16.00	0.0071

### Typical internal resistance TMT12

Rated Current [A]	Internal Resistance [Ω]
0.05	260.00
0.50	4.03
1.00	1.006
2.00	0.323
3.00	0.161
4.00	0.086
5.00	0.0494
6.00	0.0396
7.00	0.0257
8.00	0.0249
9.00	0.0129
10.00	0.0112
11.00	0.0111
12.00	0.0111
13.00	0.0109
14.00	0.0092
15.00	0.0090
16.00	0.0075




The units are calibrated for an ambient temperature of +23°C. To determine the rated current for a lower or higher ambient temperature, use a correction factor (typical value) from the table below:

Ambient Temperature [°C]	Correction factor
-5	0.87
0	0.90
10	0.95
23	1.00
30	1.05
40	1.12
50	1.20
60	1.30

Example: Rated current = 5 A, Environmental temperature = 50 °C, --> Correction factor = 1.2, Resulting current = 6.0 A



#### **Time-Current-Curves**

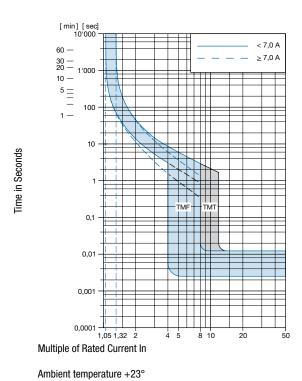

### Config. Code

### TM F 12 - 1 2 3 A B C - 1.23

The characters are placeholders for the correspondingly keys of selections from the key tables.

TM <b>F</b> 12 - 1 2 3 A B C - 1.23 <b>= Magnetic release rar</b>	nge
Magnetic release range	Configuration key
Fast	F
Slow	T
TM F 12 - <b>1</b> 2 3 A B C - 1.23 <b>= Mounting</b>	
Mounting	Configuration key
Screwflange mounting	1
TM F 12 - 1 <b>2</b> 3 A B C - 1.23 = <b>Actuation Type</b>	
Actuation Type	Configuration key
Reset type	1
TM F 12 - 1 2 <b>3</b> A B C - 1.23 <b>= Terminal</b>	
Terminal	Configuration key
Screw clamp terminals	2
TM F 12 - 1 2 3 <b>A</b> B C - 1.23 <b>= Auxiliary contact</b>	
Auxiliary contact	Configuration key
Auxiliary contact	S
TM F 12 - 1 2 3 A <b>B</b> C - 1.23 <b>= Shunt terminal</b>	

Shunt terminal  TM F 12 - 1 2 3 A B C - 1.23 = Setting indication  Setting indication	key N <b>ON</b>
FM F 12 - 1 2 3 A B C - 1.23 = Setting indication	
	on
Setting indication	
	Configuration key
Setting indication	R
TM F 12 - 1 2 3 A B C - <b>1.23 = Rated current</b>	
Rated current	Configuration key
0.05 A	0.05
0.1 A	0.1
0.15 A	0.15
0.2 A	0.2
0.3 A	0.3
0.4 A	0.4
0.5 A	0.5
0.6 A	0.6
0.7 A	0.7
0.8 A	0.8
0.9 A	0.9
1.0	1
1.1 A	1.1
1.2 A 1.3 A	1.2

Rated current	Configuration key	Rated current	Configuration key
1.4 A	1.4	5.0 A	5
1.5 A	1.5	5.5 A	5.5
1.6 A	1.6	6.0	6
1.7 A	1.7	6.5 A	6.5
1.8 A	1.8	7.0 A	7
1.9 A	1.9	7.5 A	7.5
2.0 A	2	8.0 A	8
2.1 A	2.1	8.5 A	8.5
2.3 A	2.3	9.0 A	9
2.5 A	2.5	9.5 A	9.5
2.8 A	2.8	10.0 A	10
3.0 A	3	11.0 A	11
3.3 A	3.3	12.0 A	12
3.5 A	3.5	13.0 A	13
4.0 A	4	14.0 A	14
4.5 A	4.5	15.0 A	15
Other rated currents on request		16.0 A	16
		Other rated currents on request	

#### **Variants**

Rated Current [A]		Construction variants		Config. Code	Order Number
	Auxiliary contact	Shunt terminal	Setting indication		
6				TMT12-112-6	4410.0749

Availability for all products can be searched real-time: https://www.schurter.com/en/info-center/supporttools/stock-check-distributors

**Packaging Unit** 20 Pcs

