

Miniature Fuse, 6.3 x 32 mm, Quick-Acting F, 10 A, 125 VAC, 125 VDC



125 VAC · 125 VDC · Quick-Acting F



NNO

Description

- Low Breaking Capacity
- Type D8M 125V (0.16 - 6.3 A), A12M 125V (10 A)


Weblinks

[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

Technical Data

Rated Voltage	125 VAC, 125 VDC	Resistance to Vibration	acc. to NF C 20-706 / IEC 60068-2-6, test Fc
Rated current	10 A	Shocks	acc. to NF C 20-706 / IEC 60068-2-27
Breaking Capacity	5 kA	Bumps	acc. to NF C 20-729 / IEC 60068-2-29
Characteristic	Quick-Acting F	Salt Mist	acc. to NF C 20-711 / IEC 60068-2-11
Mounting	Fuseholder / Clip		
Admissible Ambient Air Temp.	-40°C to 70°C		
Climatic Category	40/070/21 acc. to IEC 60068-1		
Material: Tube	Ceramic		
Unit Weight	3.2 g		
Storage Conditions	0°C to 60°C, max. 70% r.h.		
Product Marking	Current, Rated voltage		

Dimension

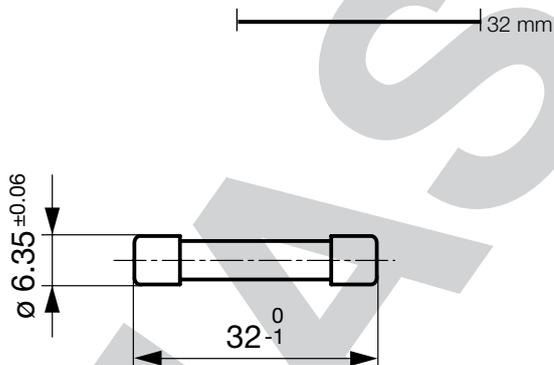


Pre-Arcing Time

Rated Current I_n 1.2 x I_n min. 1.65 x I_n max. 3.0 x I_n max.

10 A	60 min	60 min	400 ms
------	--------	--------	--------

Time-Current-Curves

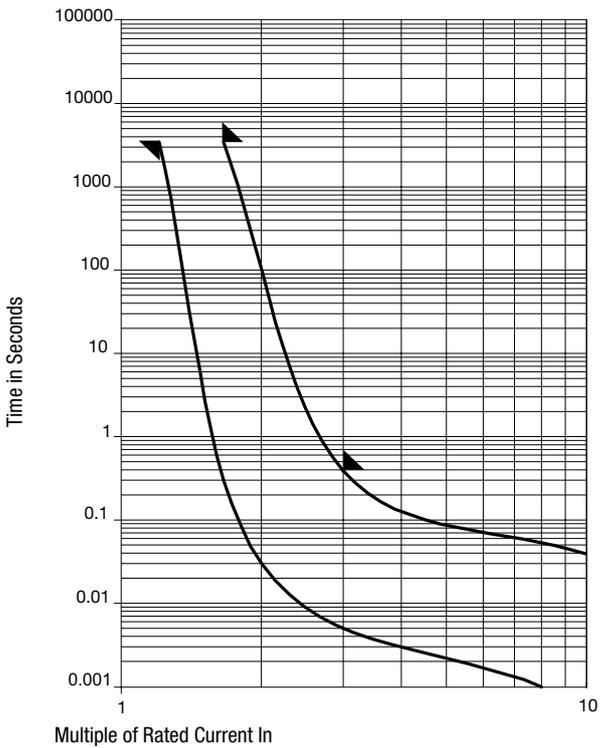

All Variants

Rated Current [A]	Rated Voltage [VAC]	Rated Voltage [VDC]	Breaking Capacity	Voltage Drop 1.0 In typ. [mV]	Order Number
10	125	125	1)	200	7023.1710

Availability for all products can be searched real-time: <http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

1) 5 kA @ 125 VAC , p.f. = 0.3 - 0.4 / 5 kA @ 125 VDC

Packaging Unit Small Box Pack (10 pcs.)

PHASE OUT