



See below: Approvals and Compliances

Weblinks

Description

- Test Probe

- Diameter 2.0 mm

Technical Data

Diameter	2mm	
Rated current	6.3A	
Admissible switching power	@ 250 Insertions:	
	220 W / max. 5 A or 75 VDC	
	440 W / max. 5 A or 50 VAC	
	@ 1000 Insertions:	
	100 W / max. 2 A or 75 VDC	
	150 W / max. 5 A or 50 VAC	
Contact resistance	$< 7 \mathrm{m}\Omega$ at 20 mV	
Allowable Operation Tempe-	-25 °C to 70 °C	
rature		

Resistance to Soldering Heat	260 °C / 5 sec acc. to IEC 60068-2-	
	20, Test Tb, method 1A	
Weight	1.1g	
Material: Housing	Thermoplastic (PC), UL 94V-2	
Surface of contacts	gold plated , Thickness 2.0µm	

pdf data sheet, html datasheet, General Product Information, Approvals,

Distributor-Stock-Check, Accessories, Detailed request for product

Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.


Application standards

Application standards where the product can be used

Organization	Design	Standard	Description				
IEC	Suitable for applications acc.	IEC/UL 62368-1	Audio/video, information and communication technology equipment - Part 1: Safety requirements				
Compliances							
The product complies with following Guide Lines							
Identification	Details	Initiator	Description				
RoHS	RoHS	SCHURTER AG	Directive RoHS 2011/65/EU, Amendment (EU) 2015/863				
•	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.				
REACH	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.				

PS 1161

Dimensions [mm]

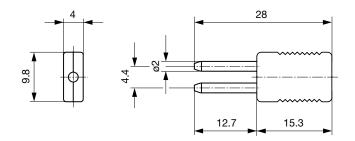

Diagrams

Variants

Product group	Color	Order Number
Test Probe	black	0040.1161
Test Probe	red	0040.1162

Availability for all products can be searched real-time: https://www.schurter. com/en/info-center/support-tools/stock-check-distributors

Packaging unit

100 Pcs

Mating Outlets/Connectors

Category / Description



Test Jacks & Probes Overview complete

PB 1151, 6.3 A, Test Jack

PB 1151